

## ALUMINUM FLASHINGS BASES AND CAPS

### Flashing Caps



Description	Part Code	Weight	Pcs/Box
1.25" Aluminum	AFC125I	0.20 lb	50
1.5" Aluminum	AFC15I	0.28 lb	50
2" Aluminum	AFC2I	0.35 lb	50
3" Aluminum	AFC3I	0.49 lb	50
4" Aluminum	AFC4I	0.75lb	40

### 12" Flashing Bases

Description	Code	Weight	Pcs/Box
1.25" Aluminum	AFF125I	0.75 lb	21
1.5" Aluminum	AFF15I	0.96 lb	21
2" Aluminum	AFF2I	1.00 lb	21
3" Aluminum	AFF3I	1.46 lb	14
4" Aluminum	AFF4I	1.56 lb	8

### 18" Flashing Bases

1.5" Aluminum	AFF1518I	1.37 lb	21
2" Aluminum	AFF218I	1.39 lb	21
3" Aluminum	AFF318I	1.94 lb	14
4" Aluminum	AFF418I	2.64 lb	8




### *Why Legend® Aluminum Flashing Products?*

- **Welded bases brazed for maximum strength**
- **Made with heavy gauge Aluminum**
- **Slotted for easy fastening**
- **All caps are spun**

## RUBBER FLASHINGS

### 5 in 1 Flashing

The one flashing with the ability to fit 1.25", 1.5", 2", 3" and 4" ABS pipe sizes and 1.5" and 2" Copper

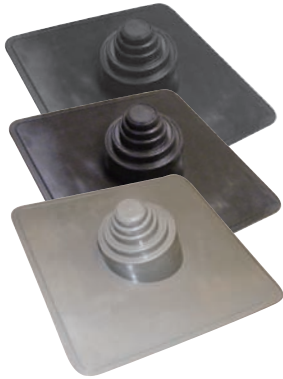

Description	Code	Weight/pc	Qty/case
5 in 1 Multi Black	RFPMULTI	230g	25
5 in 1 Multi Brown	RFPMULTIBRN	230g	25
5 in 1 Multi Beige	RFPMULTIBGE	230g	25


- Suitable for 3.5-12 to 12-12 roof pitches
- Made of Santoprene Rubber with **UV stabilizing\*** to ensure long life and flexibility to maintain tension against the pipe ensuring a leak installation
- V groove seal design allows water and ice to gently push up and not stress the seal around the pipe
- 330 mm x 330 mm large base ensures a leak free installation
- Meets CSA B272 and UPC PS64

**\*Advanced additives including UV stabilizers are used to protect and maximize the flashing flexibility allowing the watertight seal to keep working for the long term.**

### Step by Step Installation

Tear away sizes to match


1. Locate pipe opening size required

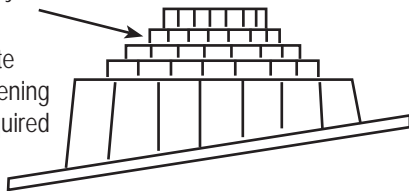


2. Insert sharp tool or a knife into perforation. Once cut has started, simply pull away the excess material by hand.



3. Carefully place flashing over pipe and thread flashing turning when applying pressure downward in a spiralling motion until flashing is at desired position.

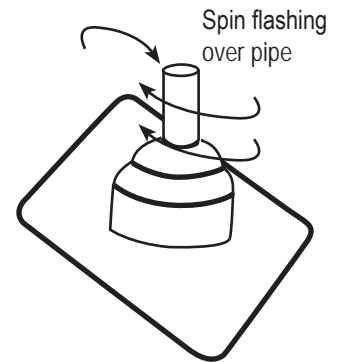

### B Roof Vent Flashing

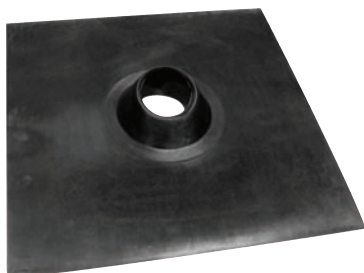

Note: Do not use petroleum based roof sealants with this product

Description	Code	Weight/pc	Qty/case	Fits
1.5" B Rubber Flashing	FRBV152020	430g	15	Plastic*
2" B Rubber Flashing	FRBV22020	432g	15	Plastic*
3" B Rubber Flashing	FRBV32020	440g	15	Cu, Plastic and C/I*
4" B Rubber Flashing	FRBV42020	448g	15	Plastic and C/I*

**\*Plastic - ABS and PVC \*C/I - Cast Iron**

- Double seal profile seals on pipe creating a permeate barrier to moisture
- Extra thick material EPDM Rubber assuring longest life possible
- Suitable for 2-12 to 6-12 roof pitches
- Meets to CSA B272 and UPC PS64

#### **WHY Legend® Rubber Flashing?**

- UV stabilized
- Thick and Tough
- Flexible
- Contractor Friendly
- Water Tight

T: 1-604-9402010 F: 1-604-9522650 E: roofing@canmet.com

**[www.thelegendproducts.com](http://www.thelegendproducts.com)**